


exclusive
TILES





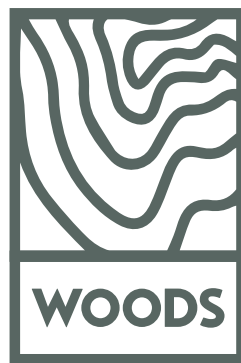

RETHINKING NATURAL STYLE

THE REVAMPING OF THE ORIGINAL MATERIAL INTO MAKING A PERFECT DESIGN IS AT THE VERY CORE OF A CONTEMPORARY DESIGN. EXCLUSIVE TENDS TO MAKE THE ESSENCE OF THE MATERIAL ITS OWN; WE UNDERSTAND THE VALUE THAT A RAW MATERIAL BEHOLDS, AND THE POWER OF MAGICAL TRANSFORMATIONS. WE DRAW OUR INSPIRATION FROM THE RECENT TREATMENTS ON THE COLOURS OF PRESTIGIOUS WOODS THAT DISTINGUISH ITSELF BY THE VIRTUE OF ITS REFINED AND EVOCATIVE COLOURS THAT ENHANCE THE CLEAN AND LIGHT PATTERNS. AS A RESULT WE HAVE TURNED THE BRILLIANCE OF WOOD INTO EXCEPTIONAL PORCELAIN STONEWARE THAT GIVES OFF A FEELING OF EXUBERANT ELEGANCE.



200x 1200mm Glazed Vitrified Tiles

THE WOODS BY EXCLUSIVE IS COMPILED OF THE TONE
200X1200MM WOOD BOTH FOR WALL AND FLOOR
INSTALLATION.





Thinking of

AN AMALGAMATION OF CREATIVELY PUT-TOGETHER THOUGHTS, INTUITIONS, AND ABILITIES. FOR A DESIGN PORTRAYS A SENSE OF MEANING AND EMOTIONS MADE FOR A WORKING ENVIRONMENT.





Thinking of
DRIFTWOOD

NEW





DRIFTWOOD

SIZE
200x1200mm

RANDOMS
9

GLAZED
VITRIFIED TILES

FINISH
MATT PUNCH



DRIFTWOOD MAPLE

exclusive
TILES

NEW

200X
1200MM

9
RANDOM



DRIFTWOOD MAPLE

www.exclusivetiles.co.in



NEW

DRIFTWOOD
MAPLE



exclusive
TILES



Thinking of
BRICOLA

NEW



BRICOLA

SIZE
200x1200mm

RANDOMS
9

GLAZED
VITRIFIED TILES

FINISH
MATT



BRICOLA TAN



BRICOLA CEREZO

exclusive
TILES

NEW

**200X
1200MM**

**9
RANDOM**



BRICOLA TAN

www.exclusivetiles.co.in



NEW

BRICOLA
TAN



exclusive
TILES

NEW

**200X
1200MM**

**9
RANDOM**



BRICOLA CEREZO

www.exclusivetiles.co.in



www.exclusivetiles.co.in

NEW



**BRICOLA
CEREZO**



NOVELA

SIZE
200x1200mm

RANDOMS
24

GLAZED
VITRIFIED TILES

FINISH
MATT



NOVELA BROWN

exclusive
TILES

NEW

200X
1200MM

24
RANDOM



NOVELA BROWN

www.exclusivetiles.co.in



NEW

NOVELA
BROWN





Thinking of
BERGAMO



BERGAMO

SIZE
200x1200mm

RANDOMS
7

GLAZED
VITRIFIED TILES

FINISH
CARVING MATT



BERGAMO ASH



BERGAMO CEDAR



BERGAMO MAPLE

exclusive
TILES

**200X
1200MM**

**7
RANDOM**



BERGAMO ASH



www.exclusivetiles.co.in



**BERGAMO
ASH**

exclusive
TILES

**200X
1200MM**

**7
RANDOM**



BERGAMO CEDAR

www.exclusivetiles.co.in





**BERGAMO
CEDAR**

exclusive
TILES

**200X
1200MM**

**7
RANDOM**



BERGAMO MAPLE

www.exclusivetiles.co.in





**BERGAMO
MAPLE**



Thinking of
DRIIFT WOOD





DRIFT WOOD

SIZE
200x1200mm

RANDOMS
15

GLAZED
VITRIFIED TILES

FINISH
MATT RELIEF



DRIFTWOOD MAPLE

exclusive
TILES

**200X
1200MM**

15
RANDOM



DRIFTWOOD MAPLE

www.exclusivetiles.co.in



**DRIFTWOOD
MAPLE**





Thinking of
MISSOURI



MISSOURI

SIZE
200x1200mm

RANDOMS
10

GLAZED
VITRIFIED TILES

FINISH
MATT RELIEF



MISSOURI LIGHT GREY



MISSOURI MAPLE

exclusive
TILES

**200X
1200MM**

**10
RANDOM**



MISSOURI LIGHT GREY



www.exclusivetiles.co.in



**MISSOURI
LIGHT GREY**

exclusive
TILES

**200X
1200MM**

**10
RANDOM**



MISSOURI MAPLE

www.exclusivetiles.co.in





**MISSOURI
MAPLE**



Thinking of
REAL



MISSOURI

SIZE
200x1200mm

RANDOMS
15

GLAZED
VITRIFIED TILES

FINISH
MATT RELIEF



REAL WOOD ASH



REAL WOOD TEAK



REAL WOOD OLIVE



REAL WOOD PINE



REAL WOOD ASH

www.exclusivetiles.co.in

200X
1200MM

15
RANDOM





**RED WOOD
ASH**

exclusive
TILES

REAL WOOD OLIVE

www.exclusivetiles.co.in

200X
1200MM

15
RANDOM





**RED WOOD
OLIVE**

exclusive
TILES

REAL WOOD PINE

www.exclusivetiles.co.in

200X
1200MM

15
RANDOM





**RED WOOD
PINE**



REAL WOOD TEAK

www.exclusivetiles.co.in

200X
1200MM


15
RANDOM





**REAL WOOD
TEAK**

LAYING SOLUTION

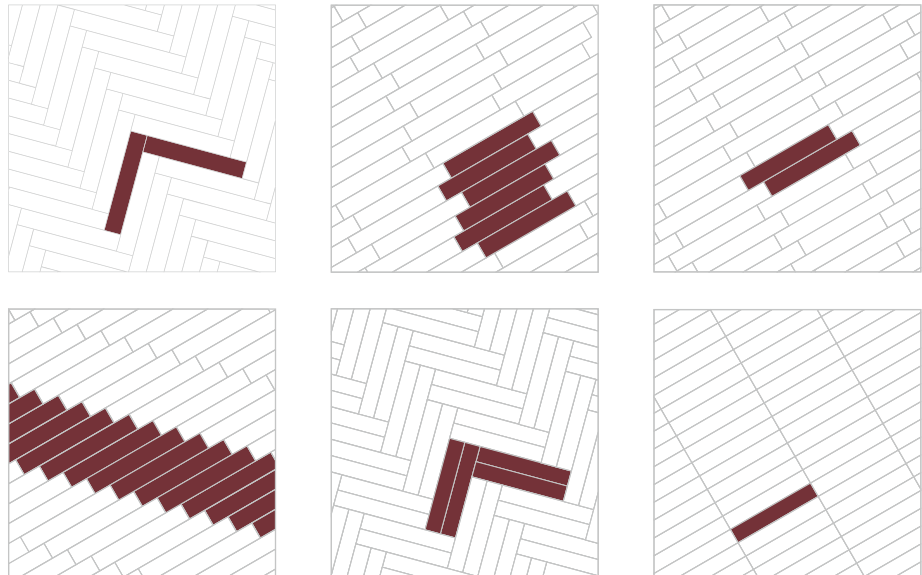


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

Porcelain stoneware - Standard EN 14411 (ISO 13006) Annex G Group Bla, E ≤ 0.5%

TECHNICAL SPECIFICATIONS			STANDARDS	VALUES REQUIRED	OUR VaLUES
				RECTIFIED	MATT
DIMENSIONS		Length and width	ISO 10545-2	± 0,3%, max 1 mm	In According
		Thickness		± 5%, max 0,5 mm	In According
		Wedging		± 0,3%, max 1,5 mm	In According
		Straightness of the edges		± 0,3%, max 0,8 mm	In According
		Flatness		± 0,4%, max 1,8 mm	In According
STRUCTURE		Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	ISO 10545-4	S ≥ 1300 N	S ≥ 2000 N
		Modulus of rupter		R ≥ 35 N/mm ²	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicator by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 ⁻⁶ max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



INSTALLATION ADVICE

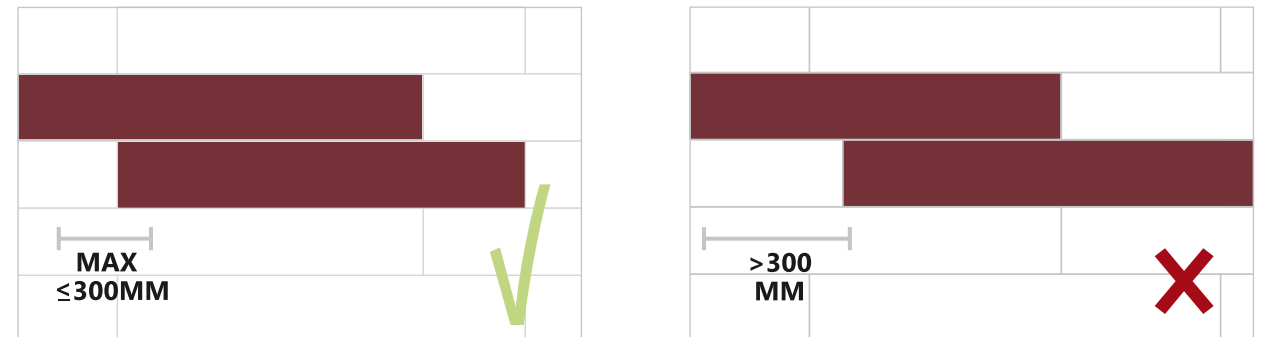

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES



*We need minimum 2000sq/mtr order for R11 surface

RETHINKING
NATURAL
STYLE

exclusive
TILES

